



made for winners

SPORT 4 CAMPIONE



100% synthetic lubricant.

USES

- **Motorcycle application**
- **Recommendation**
- **Suggestion for use**

SPORT 4 CAMPIONE is recommended for all sports 4-stroke motorcycles.

The performance of the product meets the sporting requirements of the amateur motorcycle competitor while incorporating qualities for daily use.

SPORT 4 CAMPIONE meets the requirements of 4-stroke catalytic converters. The manufacturer's recommended oil change intervals and the required minimum viscosities must be respected. The use of SPORT 4 CAMPIONE for competition requires more frequent oil changes. The composition of SPORT 4 CAMPIONE is perfectly compatible with leadfree fuels.

PERFORMANCES



RACE APPROVED

Viscosity 10W-60

The SPORT 4 CAMPIONE formula is with 100% synthetic based oils.

100% PAO formulation.

This product has successfully undergone severe testing in competition. For many years Elf has been the leader on the international circuits in friction efficiency and innovation, with its know-how guaranteeing the superior quality of SPORT 4 CAMPIONE. The formula complies with international specifications.

Its 10W-60 viscosity increases the resistance of the oil film to extreme variations in temperature.

TOTAL LUBRIFIANTS
16, rue de la République
92800 PUTEAUX
1/2


SPORT 4 CAMPIONE
May 2003
MPC/05/03



This lubricant used according to our recommendations and for its designed application does not represent any particular risk. A safety data sheet in conformity with the legislation now current in the EC is available from our local sales advisor.

CUSTOMER ADVANTAGES


- Clean engine
- Maintains power

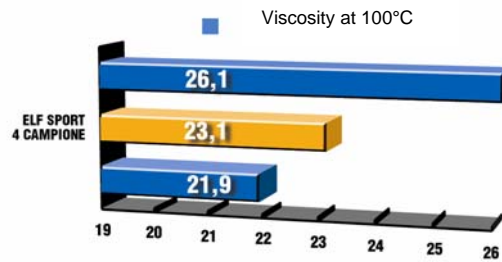

SPORT 4 CAMPIONE's fully synthetic formula, has an exceptional resistance to oxidation at high temperature. Its additives and basic oils work against the formation of deposits, and maintain a hydro-dynamic lubrication. Your engine stays clean and maintains all of its power.

- Viscosity controlled in relation to temperature
- Stability at high temperatures

Sport 4 Campione's additives improve the viscosity rating and thicken the oil at high temperature, whilst maintaining its fluidity at low temperature. The bearing HTHS viscosity (High Temperature, High Shear), of SPORT 4 CAMPIONE provides users with ideal performance under extreme pressure conditions. This flexible viscosity ensures engine protection thanks to the anti-wear capability even in the most severe speed and load situations.

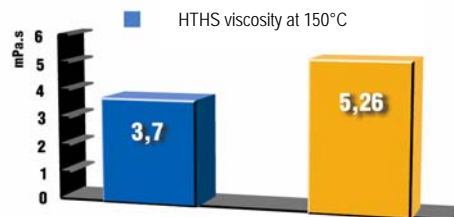

PROPERTIES

PHYSICAL-CHEMICAL PROPERTIES SPORT 4 CAMPIONE

Density at 15°C (ASTM 1298)	0.8465
OC flash point (ASTM D 92)	242 °C
Kinematic viscosity at 40°C (ASTM D 445)	158.5 mm ² /s
Kinematic viscosity at 100°C (ASTM D 445)	22.4 mm ² /s
Viscosity index (ASTM D 2270)	169
Sulfated ash content (ASTM D 878)	0.77 % by weight
Pour point (ASTM D97)	-36 °C

AFAQ ISO 9001 CERTIFICATION number 1993/900c

The specifications in this table are averages given for information only.